

## CSC 125-200 bidirectional strip cutter.



### Features:

**1-100 cuts per minute fully controllable**

Limit switches built in for control and fault indicator

24VDC power connection

### Inlet diameters:

CSC200 with inlet 140, 150, 160, 180 or 200 mm

CSC100 with inlet 080, 100 or 125mm

### Pneumatics:

Air connection 1 / 4 inch threaded or 10mm hose

Air pressure 6-8 bar

### Knives:

3 pcs made in High-speed steel DIN-17350 with 2 sides sharpened.


### Dimensions:

	CSC-200		SC-125
Height:	710mm	Height:	560mm
Width:	310mm	Width:	225mm
Depth:	110mm	Depth:	110mm
<b>540mm incl. Transitions</b>		<b>440mm incl. Transitions</b>	

### Cutting with continuous vacuum:

The guillotine-cutting device is designed to work with continuous vacuum and has no pressure loss on the suction side when it's cutting.

The cutter is built to be an alternative to rotating cutters that cuts the material in to small pieces, generates a lot of dust and has a high noise level. With the CSC cutter the waste can be cut in to longer strips, so it's possible to bale and the reduced cuts, makes the dust created by the cutter extremely low. Noise level peak is max. 65 Dba.

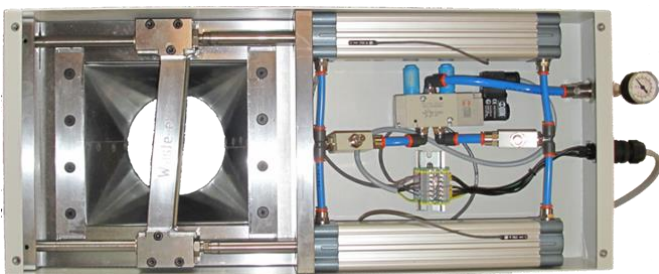

### Simple construction:

The simple construction makes the cutter almost maintenance free and the changing of blades can be made by a house mechanic.